

Type: Portable pad

Protection: IP 66

Features: Low Profile
 Portable and light
 With rubber handles
 Suitable for all environments
 Over loading protection design



Application: Vehicle/Truck Weighing
 Airplane Weighing
 Center of gravity measurement



Specifications:

Capacity	t	15
Max. Weight for single point	t	10
Temperature Effect on Zero	%FS/10°C	≤ ± 0.1
Temperature Effect on Sensitivity	%FS/10°C	≤ ± 0.1
Combined Error	%FS	≤ ± 0.5
Creep	%FS	≤ ± 0.1
Repeatability	%FS	≤ ± 0.1
Non-linearity	%FS	≤ ± 0.5
Output Sensitivity	mv/v	1.0 ± 0.3
Input Resistance	Ω	3100 ± 60
Output Resistance	Ω	2800 ± 10
Insulation Resistance	MΩ	≥ 5000
Zero Balance	%FS	≤ ± 10
Temperature, Compensated	°C	-10 ~ +50
Temperature, Operating	°C	-40 ~ +80
Excitation, Recommended	v	10 ~ 15(DC)
Safe Overload	%FS	120
Ultimate Overload	%FS	150

Dimensions:

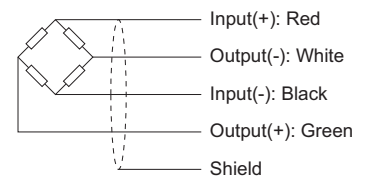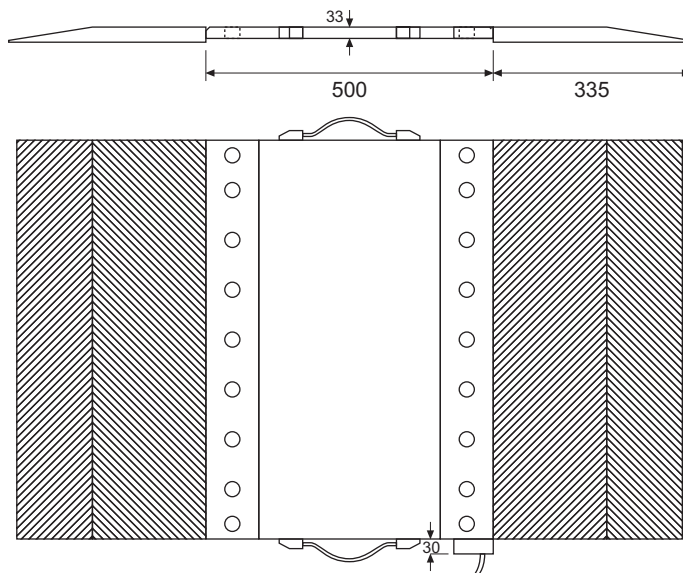

All dimensions: mm.